




8-BOLT SINGLE PIECE BODY PTO

- Eaton-Fuller transmissions
- Integrated air actuation
- 230 lb.ft torque rating
- 3 Internal Speed Ratio



SINGLE/DUAL PRESSURE DUMP PUMP

- Compact & Low Weight
- Integrated air actuation cylinder
- Easy to mount
- SAE/DIN Shaft





SPLIT SHAFT PTO



RPM DEC/INCREASER




CLUTCH PTO




TRANSMISSION PTO

TRANSFER CASE TELEMATICS

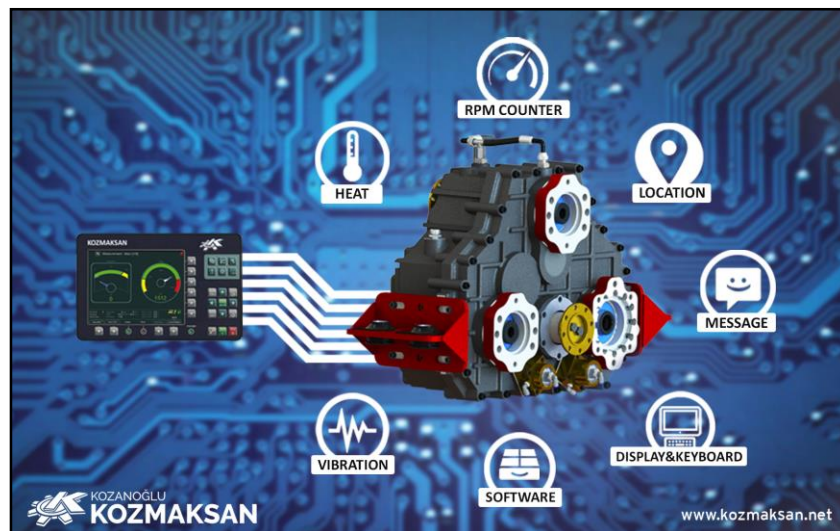

DIN SHAFT DIRECT MOUNT PTO & PUMP

- Variable displacement pumps from 40 to 120 cm³/rev
- Double Output Aluminum bent axis piston pumps
- Standard DIN shaft PTO for Allison, Eaton-Fuller, Volvo, Mack and Detroit Transmissions

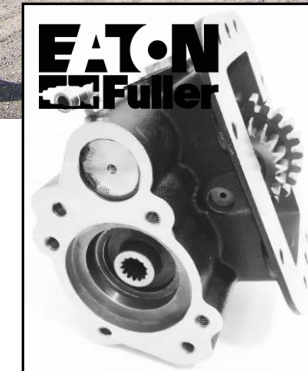

UARA.3001

Extra Durability
Aluminum Body
Unique Design